

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 134 471 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
19.09.2001 Bulletin 2001/38

(51) Int Cl.7: F16K 31/06

(21) Application number: 01106551.3

(22) Date of filing: 15.03.2001

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR  
Designated Extension States:  
AL LT LV MK RO SI

- Nakane, Hiroyuki  
Kariya-city, Aichi-pref., 448-8661 (JP)
- Watanabe, Mitsuhiro  
Kariya-city, Aichi-pref., 448-8661 (JP)
- Suda, Naoya  
Kariya-city, Aichi-pref., 448-8661 (JP)
- Kamiya, Yoshitaka  
Kariya-city, Aichi-pref., 448-8661 (JP)

(30) Priority: 17.03.2000 JP 2000075437

(71) Applicant: Denso Corporation  
Kariya-city, Aichi-pref., 448-8661 (JP)


(72) Inventors:  
• Tachibana, Seiji  
Kariya-city, Aichi-pref., 448-8661 (JP)

(74) Representative:  
Leson, Thomas Johannes Alois, Dipl.-Ing.  
Tiedtke-Bühling-Kinne & Partner GbR,  
TBK-Patent,  
Bavariaring 4  
80336 München (DE)

(54) Electromagnetic driving device for a fluid control valve

(57) In an electromagnetic driving device, a fixing core (13) has a housing portion (14), in which a plunger (17) is housed to reciprocally move, and an attracting portion (16) toward which the plunger is attracted upon energizing a coil (20). The housing portion is provided with a ring portion (15), which is formed by machining an outer circumference wall thereof and whose thickness is thinner than that of a part of the housing portion adjacent to the ring portion to an extent that mechanical strength of the housing portion is not damaged practically. The ring portion is provided with a plurality of through-holes (15a) penetrating radially the wall thereof. Amagnetic flux area of the ring portion is limited due to the thin wall and the through-holes so that magnetic resistance is enlarged.

FIG. 1

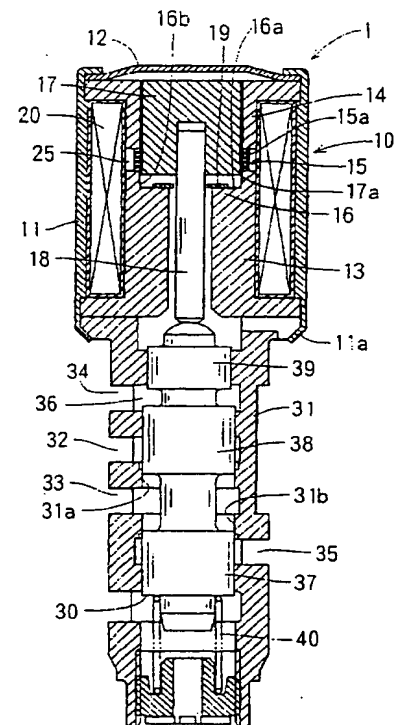

EP 1 134 471 A2

## Description

**[0001]** The present invention relates to an electromagnetic driving device in which a housing portion receiving a movable element and an attracting portion attracting the movable element are integrally formed, a fluid control valve having the electromagnetic driving device and a method of manufacturing the electromagnetic driving device.

**[0002]** In a conventional electromagnetic driving device having a fixing core in which a housing portion receiving a movable element and an attracting portion attracting the movable element are formed with separate pieces, axial centers of the housing portion and the attracting portion are likely to be offset due to their assembly errors. Therefore, not to disturb a reciprocal movement of the movable element even if the axial centers of the housing and attracting portions are offset to a certain extent, radial air gaps between the housing portion and the movable element and between the attracting portion and the movable element are larger by an offset amount of the axial centers thereof. Since larger air gap causes a reduction of attracting force, a more coil winding turn is required to secure a predetermined attracting force. Increasing the coil winding turn makes a body of the electromagnetic driving device larger.

**[0003]** To eliminate the offset of the axial centers of the housing and attracting portions, as disclosed in JP-A-11-500509 and JP-A-7-189852, is known an electromagnetic driving device in which the housing and attracting portions are integrally formed, for example, by machining. However, when the housing and attracting portions are integrally formed, magnetic flux generated upon energizing the coil are likely to pass directly between the housing portion and the attracting portion, not through the moving element so that the attracting force is limited.

**[0004]** A valve disclosed in JP-A-11-500509 is provided between the housing and attracting portions with a thin thickness throttling portion having a narrow area through which magnetic flux pass for enlarging magnetic resistance. The throttling portion serves to limit the magnetic flux passing directly between the housing portion and the attracting portion so that the attracting force of the movable element may be secured.

**[0005]** To limit the magnetic flux passing directly between the housing and attracting portions to an extent that the attracting force is sufficiently secured, the thickness of the throttling portion has to be remarkably thin. Thinner the thickness, a mechanical strength of the throttle portion is weaker so that the housing portion may be damaged.

**[0006]** Further, an electromagnetic actuator disclosed in JP-A-7-189852 is provided in a part of the housing portion with a non-magnetic material portion for enlarging the magnetic resistance. In this case, if the non-magnetic material portion is formed by diffusing the non-magnetic material, for example, by laser radiation, a sur-

face of the non-magnetic material portion tends to be rough. As the non-magnetic portion in the actuator disclosed in JP-A-7-189852 is not in slidable contact with the moving element, the movement of the movable element is not disturbed even if an inner circumferential wall of the non-magnetic portion is rough. However, in the electromagnetic actuator in which the non-magnetic material portion comes in slidable contact with the movable element, the rough surface of the non-magnetic portion causes likely to disturb a smooth movement of the movable element.

**[0007]** An object of the invention is to provide an electromagnetic driving device that is compact and generates a large attracting force without damaging a housing portion of a fixing core.

**[0008]** It is another object of the invention to provide a fluid control valve having the electromagnetic driving device in which a driving force to a movable element is stronger without enlarging a body thereof.

**[0009]** Further, it is a further object to provide a method of manufacturing the electromagnetic driving device.

**[0010]** To achieve the above objects, in an electromagnetic driving device having a coil, a movable element, and a fixing element having a housing portion in which the movable element is housed to reciprocatingly move, and an attracting portion toward which the movable element is attracted by magnetic flux to be generated upon energizing the coil, the housing portion is provided at a position radially opposed to the movable element with a ring portion, and the housing portion and the attracting portion are integrally formed. With the device mentioned above, the ring portion is provided with at least one of through-holes radially penetrating a wall thereof.

**[0011]** As the housing and attracting portions are integrally formed and worked continuously by machining. Accordingly, the offset of the axial centers of the housing and attracting portions may be eliminated. This will result in minimizing radial air gaps between the housing portion and the movable element and between the attracting portion and the movable element so that an attracting force between the attracting portion and the movable element may be increased.

**[0012]** Further, one or more through-holes are formed to enlarge magnetic resistance of the ring portion so that magnetic flux flowing directly between the integrally formed housing and attracting portions is limited. The magnetic resistance may be increased by adjusting a number and each diameter of the through-holes without reducing a thickness of the ring portion. Therefore, a mechanical strength of the housing portion is assured and the housing portion is prevented from being damaged.

**[0013]** Instead of one or more of the through-holes, the ring portion may be provided on inner or outer circumferential surface with one or more recesses or ring shaped grooves for enlarging magnetic resistance of the ring portion. The magnetic resistance may be increased

by adjusting a number, each depth and largeness (width) of the recesses or ring shaped grooves without reducing a thickness of the ring portion.

[0014] Further, to enlarge magnetic resistance of the ring portion, the ring portion may be provided on an outer circumferential surface with a non-magnetic diffusion layer. Since non-magnetic material is not diffused on an inner circumferential surface of the ring portion, the inner circumferential surface of the ring portion is not rough but smooth so that a smooth slidable movement between the movable element and the ring portion may be assured.

[0015] Furthermore, to enlarge magnetic resistance of the ring portion, the ring portion may be provided with a non-magnetic substance formed by inducing strains in metallographical structure of the ring portion, for example, based on work hardening by pressing.

[0016] It is preferable that a thickness of the wall of the ring portion is thinner than that of the housing portion axially adjacent thereto to an extent that a mechanical strength of the ring portion is not damaged practically. This will contribute to enlarge magnetic resistance of the ring portion, too.

[0017] As a method of manufacturing the magnetic driving device, it is preferable that after forming one or more through-holes radially penetrating a wall of the ring portion, resin molding is executed on an outer circumferential surface of the fixing core including the ring portion, while the through-hole is closed with a blocking member abutting on an inner circumferential wall of the ring portion. As a result, resin is not leaked via the through-hole to an inside of the ring portion.

[0018] Further, it is another method that, after making a radial thickness of the ring portion thinner than that of a part of the housing portion axially adjacent thereto, resin molding is executed on an outer circumferential surface of the fixing core including the ring portion, while the ring portion is supported by a blocking member abutting on an inner circumferential wall of the ring portion so that the ring portion is prevented from deforming due to resin pressure.

[0019] Other features and advantages of the present invention will be appreciated, as well as methods of operation and the function of the related parts, from a study of the following detailed description, the appended claims, and the drawings, all of which form a part of this application. In the drawings:

Fig. 1 is a cross sectional view showing a fluid control valve according to a first embodiment of the present invention;

Fig. 2 is an enlarged view of a ring portion according to the first embodiment;

Fig. 3A is a cross sectional view of a fixing core before the fixing core is filled with resin for forming an inner circumference spool thereon according to a manufacturing method of the first embodiment;

Fig. 3B is a cross sectional view of a fixing core after

the fixing core is filled with resin for forming an inner circumference spool thereon according to the manufacturing method of the first embodiment;

Fig. 4 is a cross sectional view of a fixing core after the fixing core is filled with resin for forming an inner circumference spool thereon according to a first modified manufacturing method;

Fig. 5 is a cross sectional view of a fixing core after the fixing core is filled with resin for forming an inner circumference spool thereon according to a second modified manufacturing method;

Fig. 6 is a front view showing an outer wall of the fixing core according to the second modified manufacturing method;

Fig. 7 is an enlarged cross sectional view of a ring portion according to a second embodiment of the present invention;

Fig. 8 is an enlarged cross sectional view of a ring portion according to a third embodiment of the present invention;

Fig. 9 is an enlarged cross sectional view of a ring portion according to a fourth embodiment of the present invention; and

Fig. 10 is an enlarged cross sectional view of a ring portion according to a fifth embodiment of the present invention.

[0020] A plurality of preferred embodiments of the present invention are described with reference to drawings.

(First embodiment)

[0021] Fig. 1 shows a fluid control valve according to a first embodiment of the present invention.

[0022] The fluid control valve 1 is a spool type hydraulic control valve for controlling operating oil to be supplied to a hydraulic control apparatus of an automatic transmission for a vehicle.

[0023] A linear solenoid 10, which serves as an electromagnetic driving device, is composed of a cylindrical yoke 11, an end plate 12, a fixing core 13, a plunger 17, a shaft 18 and a coil 20. The yoke 11, the end plate 12 and the fixing core 13 constitute a fixing element and the plunger 17 and the shaft 18 constitute a movable element. The yoke 11, the end plate 12, the fixing core 13 and plunger 17 are made of magnetic material. The fixing core 13 is fixed between the end plate 12 and a spool housing 31, in which a spool 30 is slidably and reciprocatingly held, in such a manner that both ends of the yoke 11 crimp the respective circumferential peripheries of the spool housing 31 and the end plate 12.

[0024] The fixing core has a housing portion 14, in which the plunger is housed so as to reciprocatingly move, and an attracting portion 16, which generates a magnetic attracting force for attracting the plunger 17. To prevent the plunger 17 from being adhered to the housing portion 14, an inner circumferential surface of

the housing portion 14 or an outer circumferential surface of the plunger is coated or plated with non-magnetic material.

[0025] As shown in Fig. 2, the housing portion 14 is provided at a position facing radially the plunger 17 with a ring portion 15. The ring portion 15 is formed by machining in a ring shape an outer circumferential wall of the housing portion 14. A thickness of the ring portion 15 is thinner than that of the housing portion 14 axially adjacent thereto to an extent that a required mechanical strength of the housing portion 14 is not damaged. The ring portion 15 is provided with a plurality of radially penetrating through-holes 15a. As the ring portion 15 is thin and has a plurality of the through-holes 15a, an area of the ring portion 15 through which magnetic flux pass is narrowed and limited. The through-holes 15a are provided by laser radiation, machining, press working or water jet working.

[0026] As shown in Fig. 1, the attracting portion 16 has an opposing portion 16a, which is axially opposed to the plunger 17, and a taper portion 16b, which is located between the opposing portion 16a and the ring portion 15 and whose diameter is smaller toward the opposing portion 16a. The plunger 17 is provided at an end thereof on a side of the opposing portion 16a with a taper portion 17a whose diameter is smaller toward the attracting portion 19.

[0027] The shaft 18 is press fitted into the plunger 17 and moves reciprocatingly together with the plunger 17. An end of the shaft 18 abuts on an end of the spool 30.

[0028] The coil 20 is formed in a cylindrical shape by resin molding and fixed by the yoke 11 and the fixing core 13. When current is supplied to the coil 20 from a terminal (not shown) connected in circuit with the coil 20, magnetic flux flows through a magnetic circuit constituted by the yoke 11, the plunger 17 and the fixing core 13 so that an attracting force is generated between the attracting portion 16 of the fixing core 13 and the plunger 17. Accordingly, the plunger 17 and the shaft 18 move downward in Fig. 1. The downward movement of the plunger 17 in Fig. 1 is restricted by a stopper 19.

[0029] The spool housing 31 holds the spool 30 so that the spool 30 moves reciprocatingly therein. The spool housing 31 is provided with an input port 32, an output port 33, a feedback port 34 and an ejecting port 35. Operating oil is supplied and input to the input port 32 by a pump from a tank (not shown). The operating oil is supplied to an engaging device of an automatic transmission (not shown) from the output port 33. The output port 33 is in communication with the feedback port 34 at a portion outside the fluid control valve 1 so that a part of operating oil flew out from the output port 33 is introduced to the feedback port 34. The feedback port 34 is in communication with a feedback chamber 36. The operating oil is ejected from the ejecting port 35 to the tank.

[0030] The spool 30 is provided in order from an opposite side of the linear solenoid valve 10 with a large

diameter land 37, a large diameter land 38 and a small diameter land 39. A diameter of the small diameter land 39 is smaller than that of the large diameter land 37 or 38. The spool 30 is always in contact with the shaft 18 of the linear solenoid 10. The movement of the plunger 17 is transmitted via the shaft 18 to the spool so that the spool 30 moves reciprocatingly in the spool housing 31.

[0031] A spring 40, which is disposed on an opposite side of the linear solenoid 10 and serves as biasing means, urges the spool 30 toward the linear solenoid 10.

[0032] The feedback chamber 36 is located between the large diameter land 38 and the small diameter land 39 to each of which a force responsive to an outer diameter thereof due to hydraulic oil in the feedback chamber 38 is applied. Accordingly, the hydraulic oil in the feedback chamber 38 urges the spool 30 in an opposite direction of the linear solenoid 10. Feedback of a part of the hydraulic oil output by the fluid control valve 1 serves to prevent output pressure from fluctuating due to a fluctuation of hydraulic pressure to be supplied or input. The spool 30 is at rest at a position where the biasing force of the spring 40 is balanced with a force of plunger 17 urging the spool 30 due to the electromagnetic attracting force generated in the fixing core 13 based on the current supplied to the coil and a force which the spool 30 receives from the hydraulic oil in the feedback chamber 36.

[0033] An amount of operating oil flowing from the input port 32 to the output port 33 depends on a seal length representing a length by which the an inner circumferential wall 31a of the spool housing 31 and an outer circumferential wall of the large diameter land 38 overlap each other. As the seal length is shorter, the amount of operating oil flowing from the input port 32 to the output port 33 more increases. On the contrary, as the seal length is longer, the amount of operating oil flowing from the input port 32 to the output port 33 more decreases. Similarly, an amount of operating oil flowing from the output port 33 to the ejecting port 35 depends on the seal length with respect to an inner circumferential wall 31b of the spool housing 31 and an outer circumferential wall of the large diameter land 37.

[0034] An operation of the fluid control valve 1 is described next.

(1) On de-energizing the coil

[0035] As shown in Fig. 1, when the coil 20 is not energized, the spool 30 is at rest at a position where the biasing force of the spring 40 is balanced with a feedback force of the hydraulic oil. The input port 32 is in communication with the output port and the amount of operating oil flowing from the input port 32 to the output port 33 more increases. As the ejecting port 35 is closed so that hydraulic pressure of the operating oil supplied to the automatic transmission shows maximum.

## (2) On energizing the coil

[0036] When the coil energized, the magnetic flux flowing between the housing and attracting portions 14 and 16 is limited since the ring portion 15 acts as the magnetic resistance. Accordingly, the magnetic flux flows between the housing portion 14 and the plunger 17 and between the taper portions 17a of the plunger 17 and 16b of the attracting portion 16. The magnetic flux passing directly between the housing and the attracting portions 14 and 16 not via the plunger 17 but via the ring portion 15 does not exert a force of attracting the plunger 17. As the magnetic flux is prevented from flowing directly between the housing and the attracting

portions 14 and 16, the force of attracting the plunger 17 more increases.

[0037] Upon energizing the coil 20, the plunger 17 is attracted to the attracting portion 16 against the biasing force of the spring 40 so that the spool 30 moves downward in Fig. 1. As the seal length with respect to the inner circumferential wall 31a and the larger diameter land 38 becomes longer and the inner circumferential wall 31b and the large diameter land 37 becomes shorter, the amount of operating oil flowing from the input port 32 to the output port 33 more decreases and the amount of operating oil flowing from the output port 33 to the ejecting port 35 more increases. Accordingly, hydraulic pressure of the operating oil flew out from the output port 33 decreases.

[0038] On the contrary, when the spool 30 is moved toward the linear solenoid 10, the seal length with respect to the inner circumferential wall 31a and the larger diameter land 38 becomes shorter and the inner circumferential wall 31b and the large diameter land 37 becomes longer so that the amount of operating oil flowing from the input port 32 to the output port 33 more increases and the amount of operating oil flowing from the output port 33 to the ejecting port 35 more decreases. Accordingly, hydraulic pressure of the operating oil flew out from the output port 33 increases.

[0039] In the fluid control valve 1, the linear solenoid 10 is operative to adjust a force of urging the spool 30 toward the linear solenoid 10 by controlling current to be supplied to the coil 20 so that hydraulic pressure of operating oil flew out from the output port 33 is adjusted. As an amount of current supplied to the coil 20 increases, the electromagnetic attracting force of the attracting portion 16 increases in proportion to the current amount so that an urging force of the shaft 18 for moving the spool 30 in an opposite direction to the linear solenoid 10. The spool 30 comes at rest at a position where the force acting from the plunger 17 to the spool 30 due to the electromagnetic attracting force and the force of urging the spool 30 in an opposite direction to the linear solenoid 10 due to the hydraulic pressure of feed backed operating oil are balanced with the biasing force of the spring 40. Accordingly, the hydraulic pressure of operating oil flew out from the output port 33 decreases in

proportion to the amount of current supplied to the coil 20.

[0040] Next, a method of manufacturing an inner circumference spool 21, on which the coil 20 is wound, around the fixing core 13 of the first embodiment.

(1) As shown in Fig. 3A, the thin thickness ring portion 15 is provided with the through-holes 15a. A pin 100 is inserted into an inner circumference of the housing portion 14 to constitute a blocking member for closing openings of the through-holes 15a.

(2) An outer circumference of the fixing core 13 is filled with resin so that the inner circumference spool on which the coil 20 is wound is formed.

(3) After the resin has hardened, the pin 100 is pulled out, as shown in Fig. 3B.

(4) After winding the coil 20 on the inner circumference spool 21, outer circumference of the coil 20 is further filled with resin.

## (Modification 1)

[0041] A first modified method of manufacturing the inner circumference spool 21 is described with reference to Fig. 4. Instead of inserting the pin 100 into the housing portion 14, operating oil 111 is supplied to an inside of a cylindrical cap member 110 and a cylindrical side wall of the cylindrical cap member is held inside the housing portion 14 by hydraulic pressure of operating oil 111 so that a resin leakage from the through-holes 15a is prevented. The cylindrical cap member 110 and the operating oil 111 constitute the blocking member.

## (Modification 2)

[0042] A second modified method of manufacturing the inner circumference spool 21 is described with reference to Figs. 5 and 6.

(1) A pin 120 is inserted into the housing portion 14. An outer diameter of the pin 120 is nearly equal to or slightly smaller than an inner diameter of the housing portion 14. The pin 120 is provided with a slit 121 extending diametrically and axially and a tapered surface spreading partly from the slit 121 on an opening side of the slit 121. The ring portion 15 is provided at positions facing openings of the slit 121 opened radially with the through-holes 15a, as shown in Fig. 6.

(2) A wedge rod 125 is pushed against the taper surface 122 of the pin 120 from a side opposite to an inserting side of the pin 120. The pin 120 and the wedge rod 125 constitute the blocking member. The wedge rod 125 is provided at an end thereof with a taper surface 126 whose inclination angle is approximately similar to that of the taper surface 122 of the pin 120. As the taper surface 126 of the wedge rod 125 is pushed against the taper surface

122 of the pin 120, the pin 120 receives force acting in a direction of pushing and spreading radially outwardly the pin 120 so that a leakage of resin from the through-holes 15a is prevented.

**[0043]** According to the method of manufacturing the inner circumference spool 21 mentioned above, the blocking member serves to close the through-holes 15a to prevent the resin for forming the inner circumference spool 21 from being leaked from the through-holes 15. Accordingly, the resin never disturbs a reciprocal movement of the plunger 17. Further, the blocking member not only closes the through-holes 15a but also supports the thin thickness ring portion 15 from an inside thereof so that the ring portion 15 is prevented from deforming due to pressure to be generated when the resin hardens.

**[0044]** The method of manufacturing the inner circumference spool 21 mentioned above is applicable not only to the first embodiment in which the through-holes 15a are formed in the ring portion 15 but also any of second to fifth embodiments hereinafter.

#### (Second embodiment)

**[0045]** A second embodiment of the present invention is described with reference to Fig. 7. Substantially same structure and portions as the first embodiment are affixed with the same reference numbers thereof.

**[0046]** According to the second embodiment, an outer circumferential wall of the ring portion 15 has a plurality of recesses 50. The recesses 50 are formed by laser radiation, form rolling or press working. The recesses 50 on the thin thickness ring portion 15 serves to reduce a magnetic circuit area and to enlarge a magnetic resistance.

#### (Third embodiment)

**[0047]** A third embodiment of the present invention is described with reference to Fig. 8. Substantially same structure and portions as the first embodiment are affixed with the same reference numbers thereof.

According to the third embodiment, an outer circumferential wall of the ring portion 15 has a plurality of ring shaped grooves 55. The ring shaped grooves 55 are formed by laser radiation, machining or form rolling. The ring shaped grooves 55 on the thin thickness ring portion 15 serves to reduce a magnetic circuit area and to enlarge a magnetic resistance.

**[0048]** In the first to third embodiments mentioned above, instead of forming the thin thickness ring portion 15 by machining the outer circumference thereof, the thin thickness ring portion 15 may be formed by machining an inner circumference thereof. Further, in the second or third embodiment, instead of forming the recesses 50 or the ring shaped grooves 55 on the outer circumference of the ring portion 15, the recesses 50 or

the ring shaped grooves 55 are formed on an inner circumference or on both of inner and outer circumferences of the ring portion 15.

#### 5 (Fourth embodiment)

**[0049]** A fourth embodiment of the present invention is described with reference to Fig. 9. Substantially same structure and portions as the first embodiment are affixed with the same reference numbers thereof. A non-magnetic diffusion layer 60 is provided in the thin thickness ring portion 15 by diffusing non-magnetic material to an outer circumference thereof to enlarge the magnetic resistance of the ring portion 15. As the non-magnetic material is not diffused to an inner circumference of the ring portion 15, an inner circumferential surface of the ring portion 15, which is in slidable contact with the movable element, is prevented from becoming rough. Accordingly, the movable element smoothly moves in the ring portion 15. The following methods may be contemplated for diffusing the non-magnetic material to the ring portion 15.

(1) To diffuse non-magnetic material in a gas environment by laser radiation.

(2) To diffuse solid-state non-magnetic material by laser radiation.

(3) To diffuse non-magnetic material in a gas environment by shot blast.

(4) To diffuse non-magnetic material by melting injection.

#### (Fifth embodiment)

**[0050]** A fourth embodiment of the present invention is described with reference to Fig. 10. Substantially same structure and portions as the first embodiment are affixed with the same reference numbers thereof. According to the fifth embodiment, a non-magnetic portion 65 is formed to enlarge the magnetic resistance in the thin thickness ring shaped portion 15 by inducing strains in metallographical structure of the ring portion 15. The following methods may be contemplated for inducing the strains in metallographical structure of the ring portion 15.

(1) To induce strains based on work hardening by form rolling.

(2) To induce strains based on work hardening by press working.

(3) To induce strains based on resin pressure to be generated when the coil is fixed by resin.

(4) To induce strains based on heat by laser radiation.

**[0051]** According to the embodiments mentioned above, as the housing and attracting portions 14 and 16 of the fixing core are integrally provided, the radial air

gap between the plunger 17 and the fixing element is small to a minimum extent. Further, as the thin thickness ring portion 15 has means for enlarging magnetic resistance as mentioned in the above embodiments, magnetic flux flowing directly between the housing and attracting portions 14 and 16 is limited. Accordingly, the attracting force to the plunger increases without enlarging the body of the electromagnetic driving device or the fluid control valve. Furthermore, even if the thickness of the ring portion is thicker, compared with that of the conventional ring portion by which the magnetic resistance is enlarged, the ring portion of the present invention can secure the same magnetic resistance as the conventional ring portion. Moreover, the thicker ring portion serves to more increase the mechanical strength of the ring portion, which prevents the housing portion from being damaged.

[0052] In the embodiments mentioned above, instead of making the thickness of the ring portion 15, the ring portion 15 may be provided without forming the thin portion thereof by adjusting (1) a total number and each diameter of the through-holes, (2) a total number, each depth and each largeness of the recesses 50, (3) a total number, each width and each depth of the ring shaped grooves 55, (4) depth by which the non-magnetic material is diffused or (5) largeness of the strains.

[0053] The electromagnetic driving device of the present invention is applicable not only to the electromagnetic driving apparatus having the spool type hydraulic control valve but also to any other type of electromagnetic driving apparatus having fluid control valve or device in which the attracting force to the movable element is larger without enlarging the body thereof.

[0054] In an electromagnetic driving device, a fixing core (13) has a housing portion (14), in which a plunger (17) is housed to reciprocatingly move, and an attracting portion (16) toward which the plunger is attracted upon energizing a coil (20). The housing portion is provided with a ring portion (15), which is formed by machining an outer circumference wall thereof and whose thickness is thinner than that of a part of the housing portion adjacent to the ring portion to an extent that mechanical strength of the housing portion is not damaged practically. The ring portion is provided with a plurality of through-holes (15a) penetrating radially the wall thereof. A magnetic flux area of the ring portion is limited due to the thin wall and the through-holes so that magnetic resistance is enlarged.

## Claims

### 1. An electromagnetic driving device comprising;

a coil (20);  
a movable element (17,18); and  
a fixing element (11,12,13) having a housing portion (14) in which the movable element is

housed to reciprocatingly move, and an attracting portion (16) toward which the movable element is attracted by magnetic flux to be generated upon energizing the coil, wherein the housing portion is provided at a position thereof radially opposed to the movable element with a ring portion (15), and the housing portion and the attracting portion are integrally formed, and, further, wherein the ring portion is provided with at least one of through-holes (15a) radially penetrating a wall thereof.

### 2. An electromagnetic driving device comprising;

a coil (20);  
a movable element (17,18); and  
a fixing element (11,12,13) having a housing portion (14) in which the movable element is housed to reciprocatingly move, and an attracting portion (16) toward which the movable element is attracted by magnetic flux to be generated upon energizing the coil, wherein the housing portion is provided at a position thereof radially opposed to the movable element with a ring portion (15), and the housing portion and the attracting portion are integrally formed, and, further, wherein the ring portion is provided on at least one of inner and outer circumferential surfaces with at least one of recesses (50).

### 3. An electromagnetic driving device comprising;

a coil (20);  
a movable element (17,18); and  
a fixing element (11,12,13) having a housing portion (14) in which the movable element is housed to reciprocatingly move, and an attracting portion (16) toward which the movable element is attracted by magnetic flux to be generated upon energizing the coil, wherein the housing portion is provided at a position radially opposed to the movable element with a ring portion (15), and the housing portion and the attracting portion are integrally formed, and, further, wherein the ring portion is provided on at least one of inner and outer circumferential surfaces with at least one of ring shaped grooves (55).

### 4. An electromagnetic driving device comprising;

a coil (20);  
a movable element (17,18); and  
a fixing element (11,12,13) having a housing portion (14) in which the movable element is housed to reciprocatingly move, and an attract-

ing portion (16) toward which the movable element is attracted by magnetic flux to be generated upon energizing the coil, wherein the housing portion is provided at a position radially opposed to the movable element with a ring portion (15), and the housing portion and the attracting portion are integrally formed, and, further, wherein the ring portion is provided on an outer circumferential surface with a non-magnetic diffusion layer (60).

5. An electromagnetic driving device comprising;

a coil (20);  
a movable element (17,18); and  
a fixing element (11,12,13) having a housing portion (14) in which the movable element is housed to reciprocally move, and an attracting portion (16) toward which the movable element is attracted by magnetic flux to be generated upon energizing the coil, wherein the housing portion is provided at a position radially opposed to the movable element with a ring portion (15), and the housing portion and the attracting portion are integrally formed, and, further, wherein the ring portion is provided with a non-magnetic substance (65) formed by inducing strains in metallographical structure of the ring portion.

6. An electromagnetic driving device according to any one of claims 1 to 5, wherein a thickness of the wall of the ring portion is thinner than that of a part of the housing portion axially adjacent thereto.

7. A fluid control valve having the electromagnetic driving device according to any one of claims 1 to 5, further comprising:

a cylindrical housing (31) having a plurality of ports (32,33,34,35) through which fluid flows; a spool (30) being reciprocally moved in the cylindrical housing along with the movable element for adjusting amounts of fluid flowing through the respective ports; and  
biasing means (40) for urging the spool in an opposite direction to a direction in which the movable element is attracted to the attracting portion.

8. A method of manufacturing an electromagnetic driving device having a coil (20) wound on a spool (21), a movable element (17,18), and a fixing element (11,12,13) having a housing portion (14) in which the movable element is housed to reciprocally move, and an attracting portion (16) toward

which the movable element is attracted by magnetic flux to be generated upon energizing the coil, wherein the housing portion is provided at a position radially opposed to the movable element with a ring portion (15), and the housing portion and the attracting portion are integrally formed, comprising steps of:

forming at least one of through-holes (15a) radially penetrating a wall of the ring portion; and executing resin molding on an outer circumferential surface of the fixing core including the ring portion, while the through-hole is closed with a blocking member (100, 110&111, 120&125) abutting on an inner circumferential wall of the ring portion so that resin is not leaked via the through-hole to an inside of the ring portion.

9. A method of manufacturing an electromagnetic driving device having a coil (20) wound on a spool (21), a movable element (17,18), and a fixing element (11,12,13) having a housing portion (14) in which the movable element is housed to reciprocally move, and an attracting portion (16) toward which the movable element is attracted by magnetic flux to be generated upon energizing the coil, wherein the housing portion is provided at a position radially opposed to the movable element with a ring portion (15), and the housing portion and the attracting portion are integrally formed, comprising steps of:

making a radial thickness of the ring portion thinner than that of a part of the housing portion axially adjacent thereto; and  
executing resin molding on an outer circumferential surface of the fixing core including the ring portion, while the ring portion is supported by a blocking member (100,110%111, 120&125) abutting on an inner circumferential wall of the ring portion so that the ring portion is prevented from deforming due to resin pressure.

10. A method of manufacturing an electromagnetic driving device according to claim 9, further comprising steps of:

forming at least one of through-holes (15a) radially penetrating a wall of the ring portion, wherein the blocking member closes the through-hole so that resin is not leaked via the through-hole to an inside of the ring portion.



FIG. 1

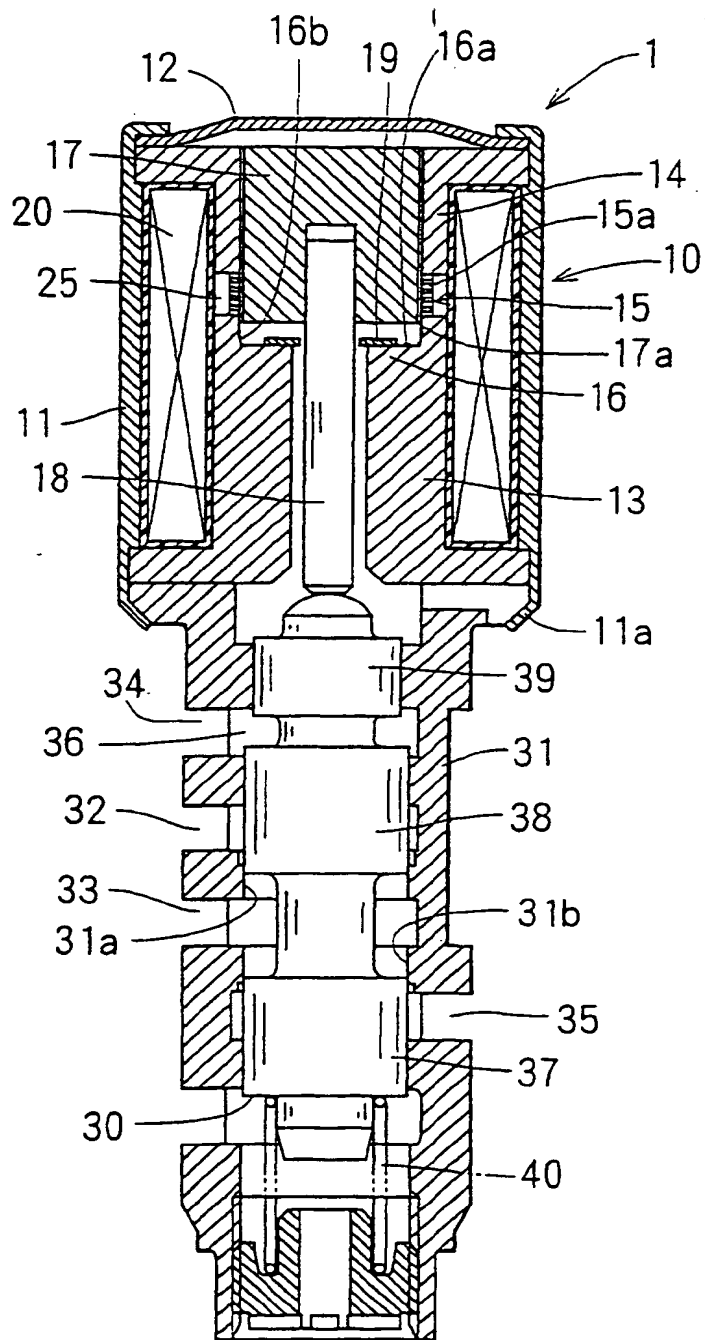


FIG. 2

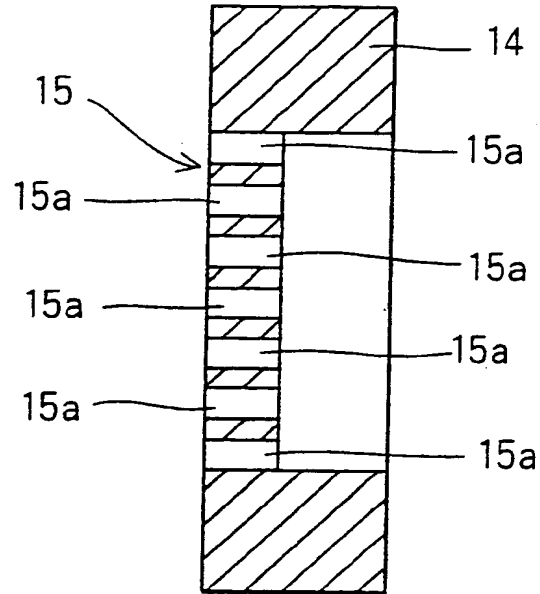


FIG. 3A

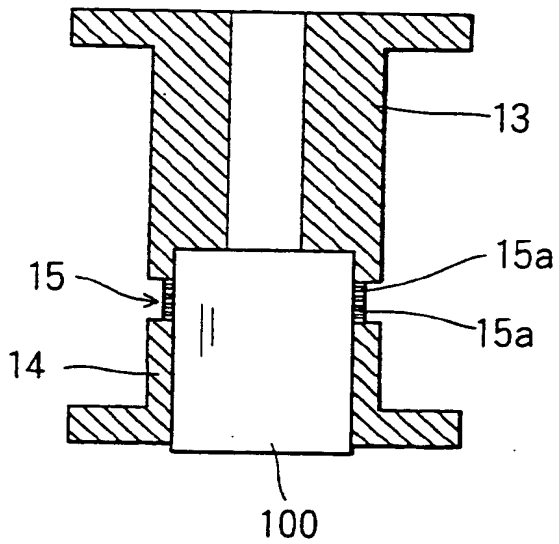


FIG. 3B

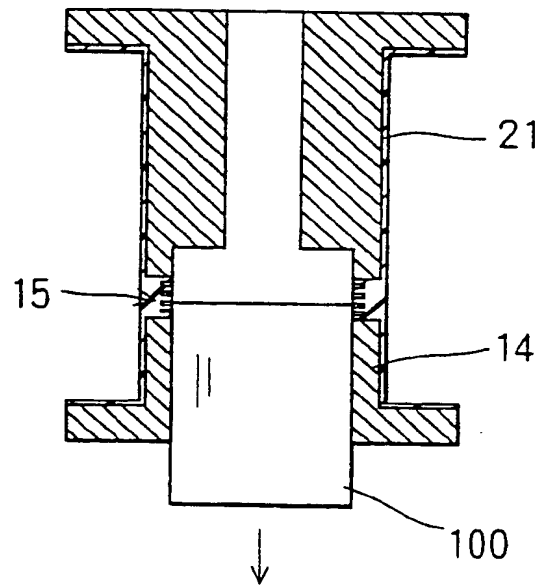


FIG. 4

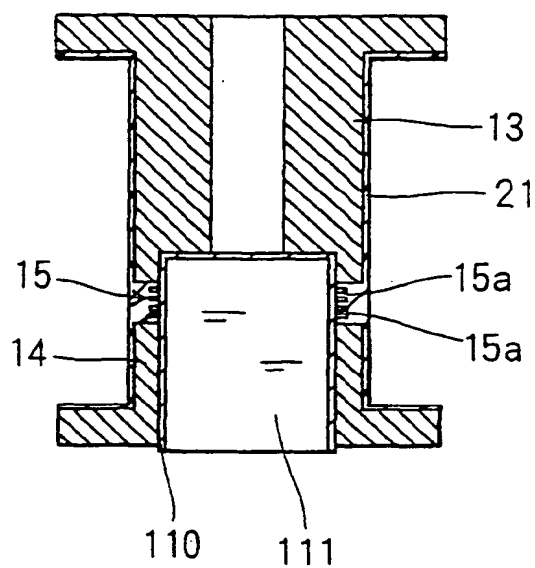


FIG. 5

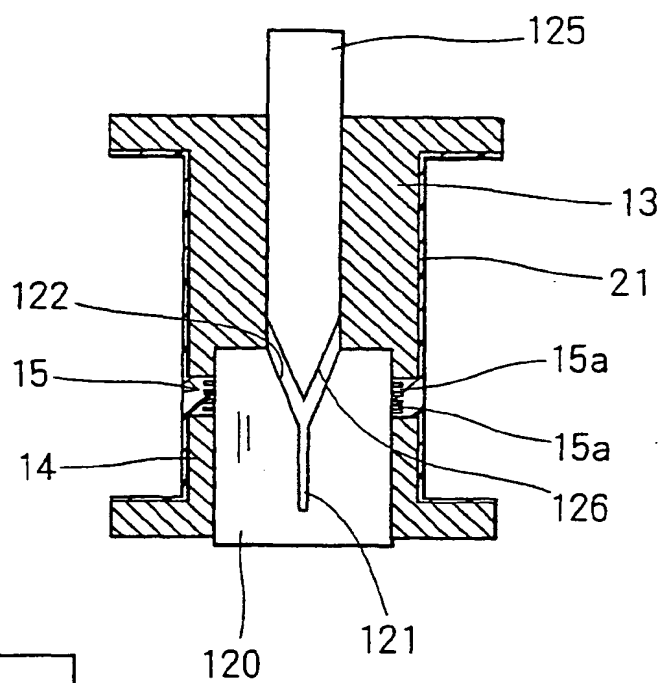


FIG. 6

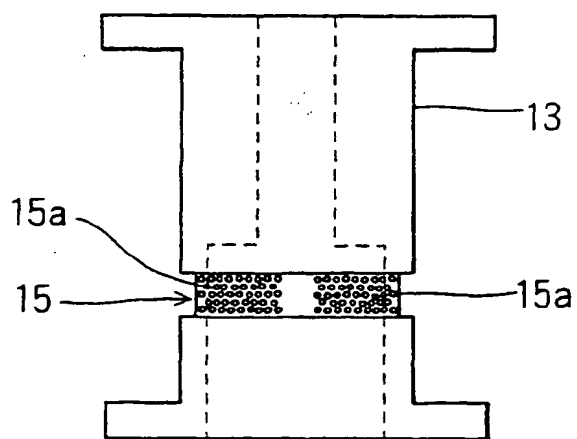


FIG. 7

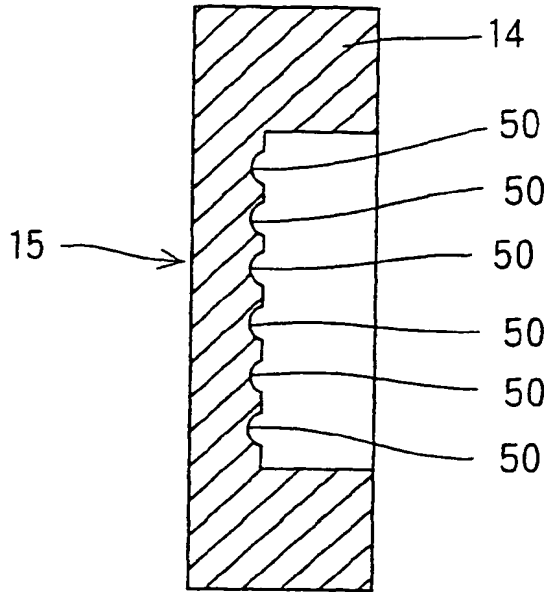


FIG. 8

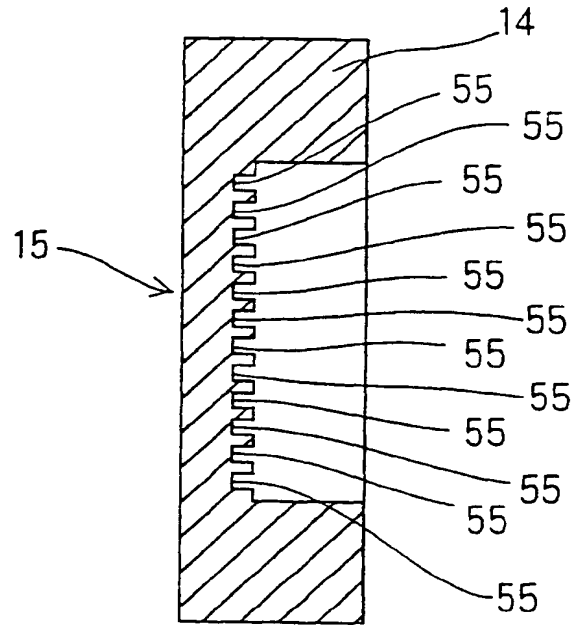


FIG. 9


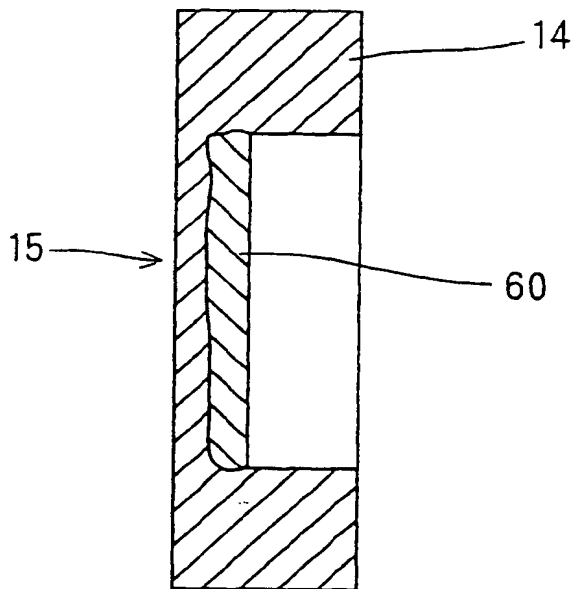


FIG. 10





Europäisches Patentamt  
European Patent Office  
Office européen des brevets

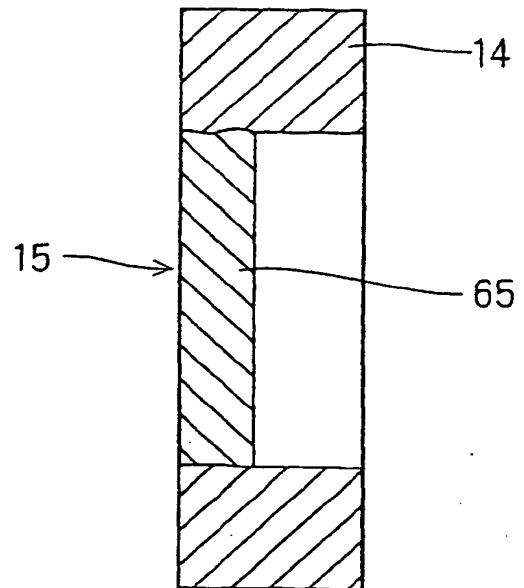

(11) **EP 1 134 471 A3**

(12)

## EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
11.12.2002 Bulletin 2002/50

(51) Int Cl.7: **F16K 31/06**

(43) Date of publication A2:  
19.09.2001 Bulletin 2001/38

(21) Application number: 01106551.3

(22) Date of filing: 15.03.2001

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

- Nakane, Hiroyuki  
Kariya-city, Aichi-pref., 448-8661 (JP)
- Watanabe, Mitsuhiro  
Kariya-city, Aichi-pref., 448-8661 (JP)
- Suda, Naoya  
Kariya-city, Aichi-pref., 448-8661 (JP)
- Kamiya, Yoshitaka  
Kariya-city, Aichi-pref., 448-8661 (JP)

(30) Priority: 17.03.2000 JP 2000075437

(71) Applicant: **Denso Corporation**  
Kariya-city, Aichi-pref., 448-8661 (JP)


(74) Representative:  
**Leson, Thomas Johannes Alois, Dipl.-Ing.**  
**Tiedtke-Bühling-Kinne & Partner GbR,**  
**TBK-Patent,**  
**Bavariaring 4**  
**80336 München (DE)**

(72) Inventors:  
• Tachibana, Seiji  
Kariya-city, Aichi-pref., 448-8661 (JP)

### (54) Electromagnetic driving device for a fluid control valve

(57) In an electromagnetic driving device, a fixing core (13) has a housing portion (14), in which a plunger (17) is housed to reciprocatingly move, and an attracting portion (16) toward which the plunger is attracted upon energizing a coil (20). The housing portion is provided with a ring portion (15), which is formed by machining an outer circumference wall thereof and whose thickness is thinner than that of a part of the housing portion adjacent to the ring portion to an extent that mechanical strength of the housing portion is not damaged practically. The ring portion is provided with a plurality of through-holes (15a) penetrating radially the wall thereof. Amagnetic flux area of the ring portion is limited due to the thin wall and the through-holes so that magnetic resistance is enlarged.

**FIG. 1**

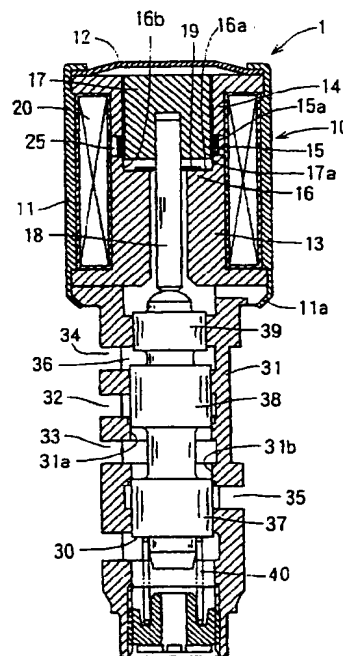

**EP 1 134 471 A3**



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 01 10 6551

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	PATENT ABSTRACTS OF JAPAN vol. 006, no. 176 (E-130), 10 September 1982 (1982-09-10) & JP 57 092806 A (CKD CONTROLS LTD), 9 June 1982 (1982-06-09) * abstract *	1,6	F16K31/06
X	US 2 853 659 A (ERICH HERION) 23 September 1958 (1958-09-23) * column 2, line 12 - column 3, line 30; figures *	2,6	
Y	---	5,7	
X	US 4 486 053 A (HAWKER MICHAEL J ET AL) 4 December 1984 (1984-12-04) * column 3, line 36 - line 43; figure 1 *	3,6	
X	DE 197 27 414 A (BOSCH GMBH ROBERT) 7 January 1999 (1999-01-07) * column 3, line 53 - column 4, line 5; figure 1 *	4,6	
A	* column 5, line 23 - line 27; figure 1 *	8-10	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
Y	US 4 920 009 A (LEE ROBERT W ET AL) 24 April 1990 (1990-04-24) * abstract *	5	F16K H01F
Y	EP 0 233 166 A (THOMAS TECHNIK GMBH) 19 August 1987 (1987-08-19) * column 4, line 37 - column 5, line 47; figure 1 *	7	
A	PATENT ABSTRACTS OF JAPAN vol. 010, no. 376 (E-464), 13 December 1986 (1986-12-13) & JP 61 168215 A (DIESEL KIKI CO LTD), 29 July 1986 (1986-07-29) * abstract *	8-10	
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 14 October 2002	Examiner Rusanu, I
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document</p> <p>T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons &amp;: member of the same patent family, corresponding document</p>			

EPO FORM 1503 (03.02) (PotC31)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 10 6551

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

14-10-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 57092806	A	09-06-1982	NONE	
US 2853659	A	23-09-1958	NONE	
US 4486053	A	04-12-1984	DE 3171258 D1	08-08-1985
			EP 0051965 A1	19-05-1982
			JP 1635357 C	20-01-1992
			JP 2059349 B	12-12-1990
			JP 57107480 A	03-07-1982
DE 19727414	A	07-01-1999	DE 19727414 A1	07-01-1999
			WO 9900804 A1	07-01-1999
			EP 0922287 A1	16-06-1999
			JP 2001500321 T	09-01-2001
US 4920009	A	24-04-1990	NONE	
EP 0233166	A	19-08-1987	SE 447853 B	15-12-1986
			EP 0233166 A2	19-08-1987
JP 61168215	A	29-07-1986	JP 1747507 C	25-03-1993
			JP 4038125 B	23-06-1992

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82